


better together

Dramix[®]



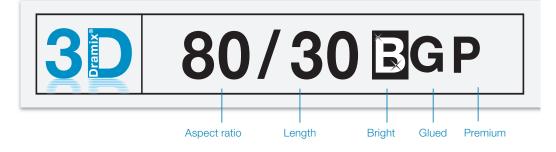

DATASHEET

Characteristics

Material properties

Nom. tensile strength:	3.070 (N/mr
Young's modulus:	200.000 (N/mr
Strain at ultimate strength:	1,5

3D

30 mm

80

m²) m²) 5%

Geometry

fibre family



Length (I)

Diameter (d)

0,38 mm

Aspect ratio (I/d)



Minimum EN 14889-1 dosage


25 kg/m³

Fibre network 28.045 m/m³ at 25 kg/m³ 35.726 fibres/kg

Dramix® family

local Bekaert office

- **3D Typical SFRC applications**
- 4D Supreme serviceability control
- 5D Advanced structural applications



Product certificates*



* Product certificates are plant specific.

Product conformity

Dramix[®] conforms to ASTM A820, EN 14889-1 and ISO 13270 Class A.

System certificates



All Dramix® plants are ISO 9001 and ISO 14001 certified.



20 kg

Handling



DRAMIX® 3D 80/30BGP

The original anchorage

Dramix[®] 3D is the cost-efficient fibre for standard statically indeterminate concrete structures that are submitted to regular static, fatigue and dynamic loadings.

Glue technology for three-

dimensional reinforcement avoiding fibre balling during mixing and ensures a homogeneous distribution of fibres throughout the concrete mix.

The high performant strength

Dramix[®] 3D Premium is a high performant fibre to create optimal ductility in high strength concrete.

Bekaert construction support

You can count on our support for each step of your project, from concept design to on-site quality support. Our services include recommendations on slab design, construction detailing, concrete optimization and automatic total quality share our knowledge with you and your

Feel free to ask us for a workshop or training on the topic of steel fibre reinforcement in your offices.

For recommendations on handling, dosing and
mixing visit

www.bekaert.com/dosingdramix. Any other specific document or certificate can be found on

www.bekaert.com/dramix/downloads.

